



DOWNLIGHTS

DOWNLIGHT ALUS

Downlight de uso comercial que aúna las mejores prestaciones y un diseño moderno y estilizado, que lo convierten en una apuesta segura en zonas en las que es necesario un gran paquete lumínico y una estética contemporánea.

IP44

ENEC O5

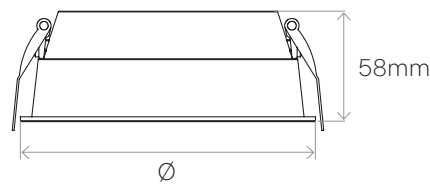



Cod.	W	K	lm	Reg.	g	Ø mm	Ø Corte mm
7100020500		3.000					
7100020501	9	4.000	1.100		300	134	125
7100020502		5.500					
7100020503		3.000					
7100020504	17	4.000	2.200	No	350	155	145
7100020505		5.500					
7100020506		3.000					
7100020507		4.000	3.300		600		
7100020508	25	5.500				209	200
7100020509		4.000					
7100020529		5.500	3.250	Sí (DALI-2)	620		

Accesorios


7250080174 Aro montaje para ALUS 9W corte Ø125-140mm

7250080175 Aro montaje para ALUS 17W corte Ø145-160mm














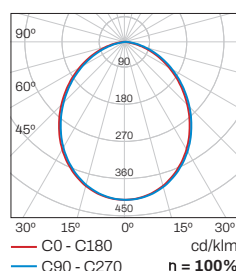


7250080176 Aro montaje para ALUS 25W corte Ø200-220mm

-  3.000 K
-  4.000 K
-  5.500 K

7100020500



* Consultar en tabla referencias regulables

 IRC>80	 90°	 *	 IP 44	 L80 B20 50.000h	 24 / 7
 SWITCH OFF ON 100.000	 TIME OFF ON < 0,5 s	 +40 -20 °C	 CLASE II	 P.F. > 0,9	 SDCM < 5
 220-240 VAC 50-60Hz	 DALI-2	 DALI	 ENEC O5	 5 AÑOS GARANTÍA	